

L^{DR}
 SERIES
20

**Valves for fixed installations
 20 mm for Inert/CO₂ gases**

SPECIFICATIONS


Product code	LDR20/25	LDR25/50	Product code
Discharge type	Total	Total	Discharge type
Working pressure	25 - 50 bar	25 - 50 bar	Working pressure
Orifice size	Ø 12 mm	Ø 12 mm	Orifice size
Inlet connection	25E EN-629-1	25E EN-629-1	Inlet connection
Outlet Connection	3/4" NPT male	3/4" NPT male	Outlet Connection
Burst disc pressure	Must be adapted to the working pressure		Burst disc pressure
Valve Body	Brass	Brass	Valve Body
Temperature range	-20°C to +60°C	-20°C to +60°C	Temperature range
Max pressure	200 bar	200 bar	Max pressure

OPTIONS

- * GdWJU' b'Yh
- * GdWJU' Ci hYh
- * ; U [Y
- * ; U [Yk]h,]bHY[fUHYXdfYgji fY'gk]HW
- * DfYgji fY'gk]HW

ORDERING (When ordering, please specify)

- * Series number or attribution
- * Type of gas
- * Connections
- * Burst disc pressure "P"
- * Options

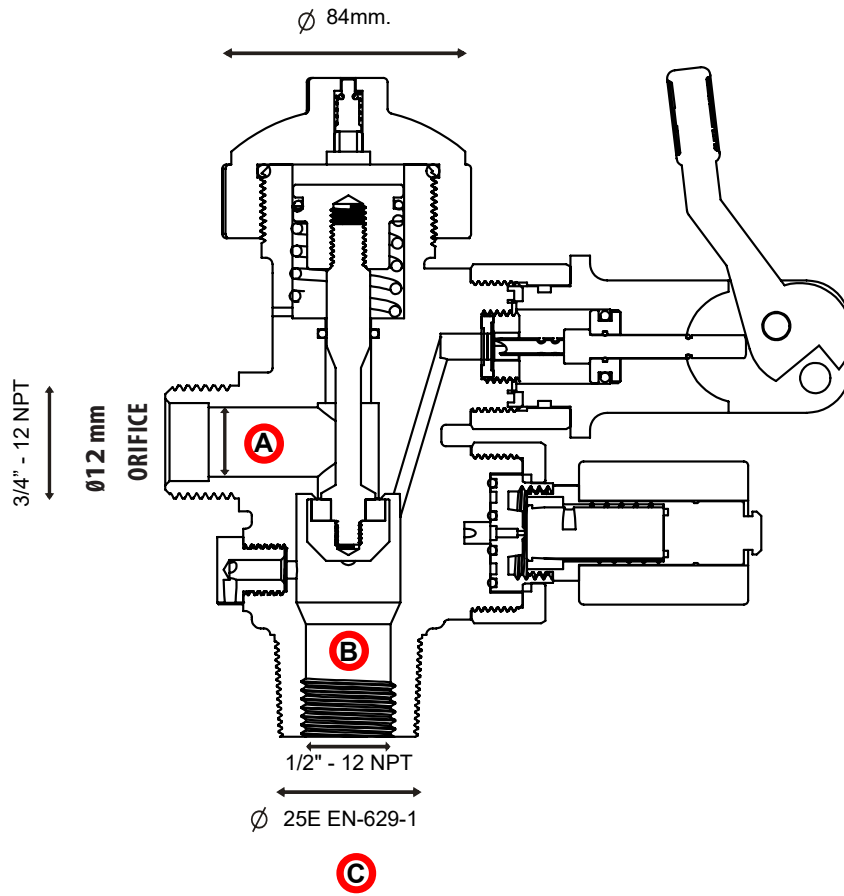

TECNICAL SPECIFICATIONS

Working pressure P. Max	25/50 Bar
Valve Body	Brass
Inlet Connection	C = 25E EN-629-1
Outlet Connection	A = 3/4" - 12 NPT
Gauge	Has to be specified
Dip Tube Connection	B = 1/2" - 12 NPT